

SCREW CONVEYOR UH300-350-400

UH300-350-400

ALTINBILEK Screw Conveyor ensures the horizontal, sloped, or vertical transport of the powder and granule products. It is used in conveyance for feeding, distribution, collection, mixing, dosing, and discharging purposes. There are 2 types of screw conveyors: U-type (Hull) and Tube Type, both of which are helical and are manufactured as galvanized steel, painted steel, and stainless steel depending on the requirement. Used in all branches of industry.

- **Foods**
Flour, Rice, Tea, Sugar, Milk Powder, Various Powders, Flakes, and Granules
- **Animal Feeds and Cereals**
Wheat, Barley, Corn, Oil Seeds, Various Feeds, Pellets, and Flakes
- **Chemicals and Minerals**
Cement, Sand, Glass Crumb, Ash, Limestone, Ore, Coal, Salt, Fine and Natural Dust, Flakes, Granules
- **Biomass and Waste**
Wood Pellets, Chips, RDF, Rubber, Plastics, Other Flakes, Pellets, and Granules

FEATURES

- U-Type or Tube-Type Body Structure
- Heavy Duty Type
- Synthetic Intermediary Bearings
- Impermeable Dust Seals
- Easy Maintenance and Simple Installation
- Silent and Vibration-free Operation

DRIVE SYSTEM

- Direct Drive with Reducer Motor and Chain Coupling (Standard)
- Power Transmission with Belt-Pulley Connection (Optional)
- Power Transmission with Chain Connection (Optional)

SECURITY SYSTEM

- Speed Guard Sensor (Standard)
- Excessive-product Detection Sensor (Standard)
- Roller Heat Detection Sensor (Optional)
- Roller Pulse Detection Sensor (Optional)
- Product Flow Detection Sensor (Optional)

ACCESSORIES

- Inlet Module
- Outlet Module
- Housing for Rotating parts
- Motor Housing
- Support Legs with Height Adjustment
- Lower Cleaning Covers (Optional)
- Wear Plates (Optional)
- Impermeability with Rope Seal (Optional)
- Transparent Observation Hatch (Optional)

TECHNICAL SPECIFICATIONS

Machine	UH300	UH350	UH400
Maximum Capacity	83m ³ /h	127m ³ /h	176m ³ /h
Maximum Length and Slope	According to the product specifications		
Drive System	According to the application		
Sound Level	60-80 dB		
Operating Conditions	-15°C ÷ 40°C ambient temperature		

MATERIALS

Body	Standard	Painted (Carbon Steel)
	Optional	Stainless Galvanized Steel and Hot Dipped Galvanized Coating
Auger	Standard	Steel
	Optional	Stainless
Intermediary Bearing	Standard	>3m
	Optional	<3m
Step	Standard	Right, Left Full Step
	Optional	Variable Pitch, Fixed Conical Pitch

COMPATIBILITY


ATEX	Standard	Out of Zone
	Optional	Zone 22 - 21

NOTE: ATEX compatibility requires special requirements.



SCREW CONVEYOR UH300-350-400

UH300-350-400

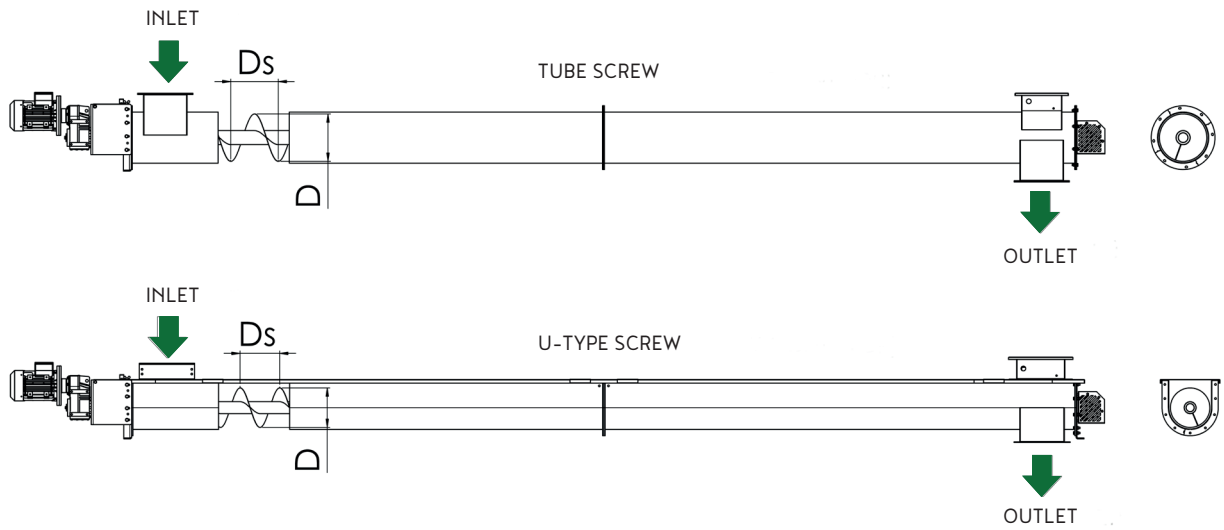

MODEL	Screw Leaf Diameter D (mm)	Screw Leaf Pitch Ds (mm)	Capacity (m ³ /h)	Wheat Fullness 45% (t/h)	Flour Fullness 45% (t/h)
UH300	300	300	83	62	45
UH350	350	350	127	95	70
UH400	400	400	176	132	97

Designs and dimensions are subject to change without notice